


20-Foot Cargo Trailer

Maximize hauling productivity

Move 30,000 lbs (13,608 kg) of cargo at speeds of 20 - 25 mph (32 to 40 kph)

A versatile trailer equipped to handle

both 96 in (244 cm) and 88 in (224 cm) cargo pallets, as well as one 239 in (607 cm) container or two 125 in (318 cm) containers.

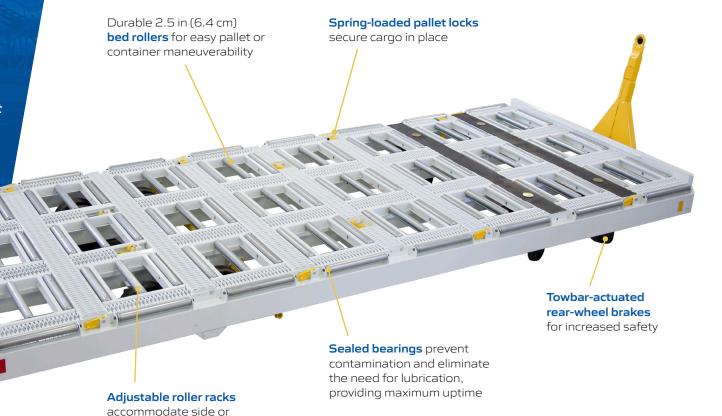

Options

end loading, and provide flexibility for any operation

LOADERS DOLLIES STAIRS RACKS

DECKS


CARTS


• Hot-dip galvanizing provides additional corrosion resistance



SPECIFICATIONS

| Capacity | 30,000 lbs (13,608 kg) |
|--------------------------|--|
| Weight | 5,720 lbs (2,595 kg) |
| Length / Width | 273 in (696 cm) / 104.5 in (265.4 cm |
| Track Width | 88 in (223.5 cm) |
| Hubs | 1.5 in or 1.38 in (3.8 cm or 3.5 cm) diameters with sealed Timken bearings |
| Rear Hitch | Spring-loaded or E-type standard, other types available |
| Brakes | Towbar-actuated rear-wheel brakes |
| Tires | Solid size: 4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6 cm) diameter |
| Bed Rollers / Casters | 2.5 in (6.4 cm) diameter rollers, 11-gauge with sealed bearings and 11/16 in (1.75 cm) hex shaft Rear end only lead-edge rollers: 3.5 in (8.89 cm) diameter with sealed bearings and 11/16 in (1.75 cm) hex shaft |
| Running Gear | Tandem dual-wheeled, spring-cushioned swivel casters in front, dual-wheeled rigid casters in rear |
| Steering | Front swivel casters steering |
| Container Stops | Manual, spring-loaded, detented |

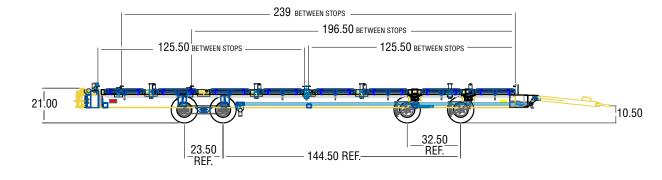

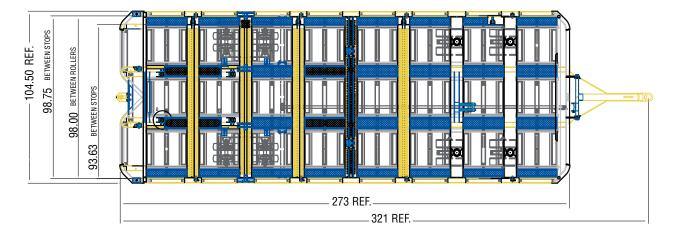

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com