

# Inverted Caster Bed Cargo Dolly

## Maneuver & adapt to changing loads

Take on LD-2, LD-3, LD-4 and LD-11 containers, including two LD-2 or LD-3 containers at a time. Also able to handle half, 88 x 125 in (224 x 318 cm), and 96 x 125 in (244 x 318 cm) pallets to accommodate ever-changing workloads.


As many as **five dollies** can be **stacked** and **rolled** onto transport carriers without crating for shipping

High-quality, **top grade zinc hardware** withstands years of rugged, daily use

Towbar-actuated **rear-wheel brakes** for increased safety

Eight wheels across the dolly frame easily **carry 15,000 lbs** (6,804 kg)

**Swivel casters steering** for easy maneuverability

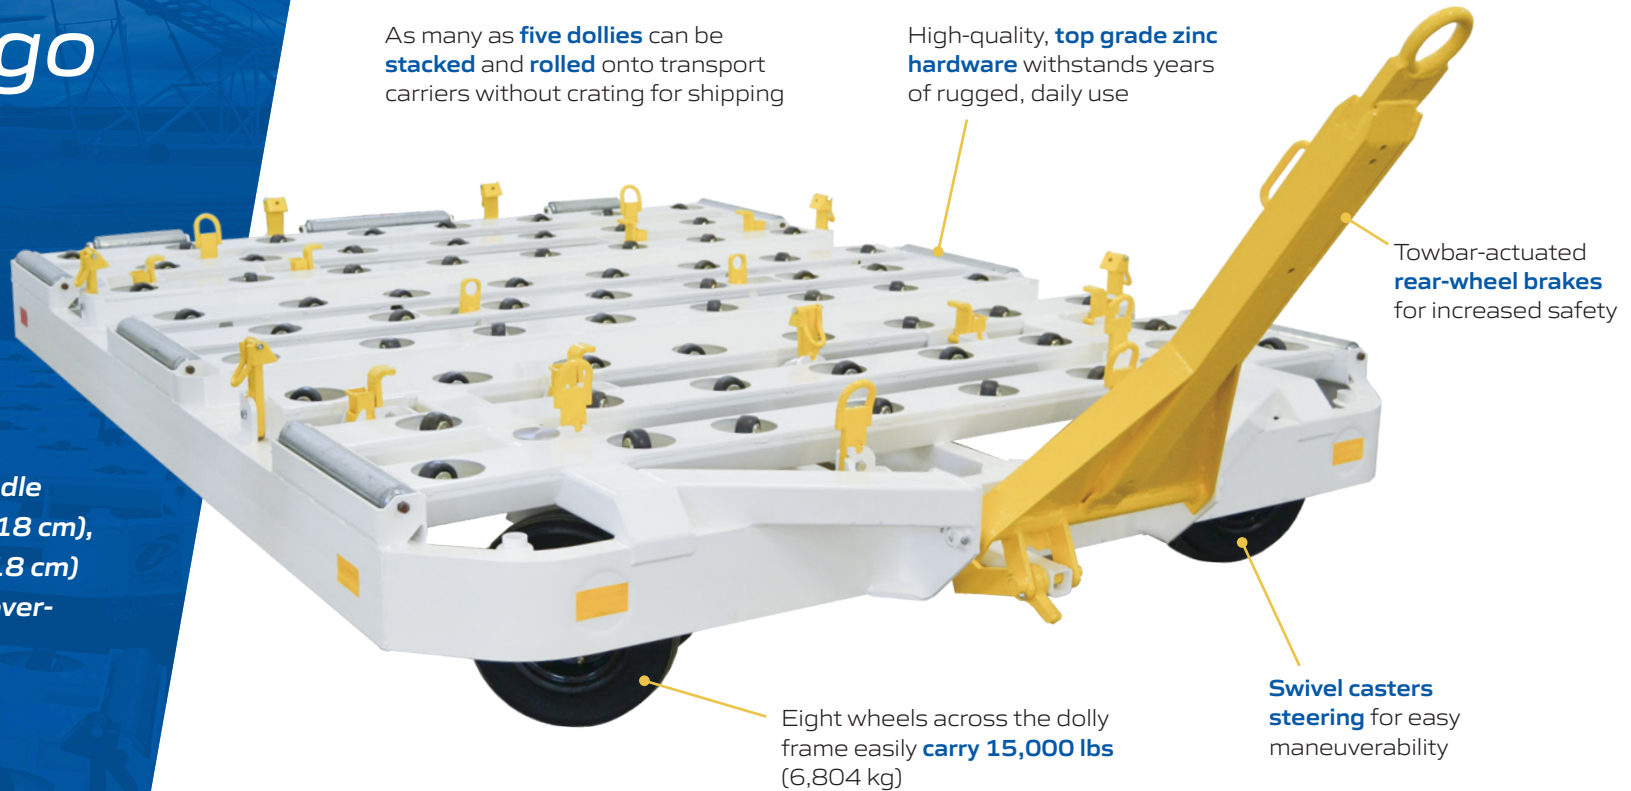


CARTS  
LOADERS  
DOLLIES  
STAIRS  
RACKS  
DECKS

## Options

- Spring-loaded E-hitches come standard; **pintle hitches** are available
- **Hot-dip galvanizing** provides additional corrosion resistance

**SPECIFICATIONS**

Capacity	15,000 lbs (6,804 kg)
Weight	2,338 lbs (1,061 kg)
Length / Width	135.5 in (344 cm) / 102 in (259 cm)
Hubs	1.5 in or 1.38 in (3.8 cm or 3.5 cm) diameters with sealed Timken bearings
Rear Hitch	Spring-loaded E-hitch; pintle hitch available
Brakes	Towbar-activated rear-wheel brakes
Tires	Solid size: 4 x 8 in (10.2 x 20.3 cm) / 15.75 in (40 cm) diameter
Bed Rollers / Casters	Sealed caster bearings
Running Gear	Dual-wheeled swivel casters in front, dual-wheeled fixed axle in rear
Steering	Front swivel casters
Container Stops	Manual, spring-loaded, detented

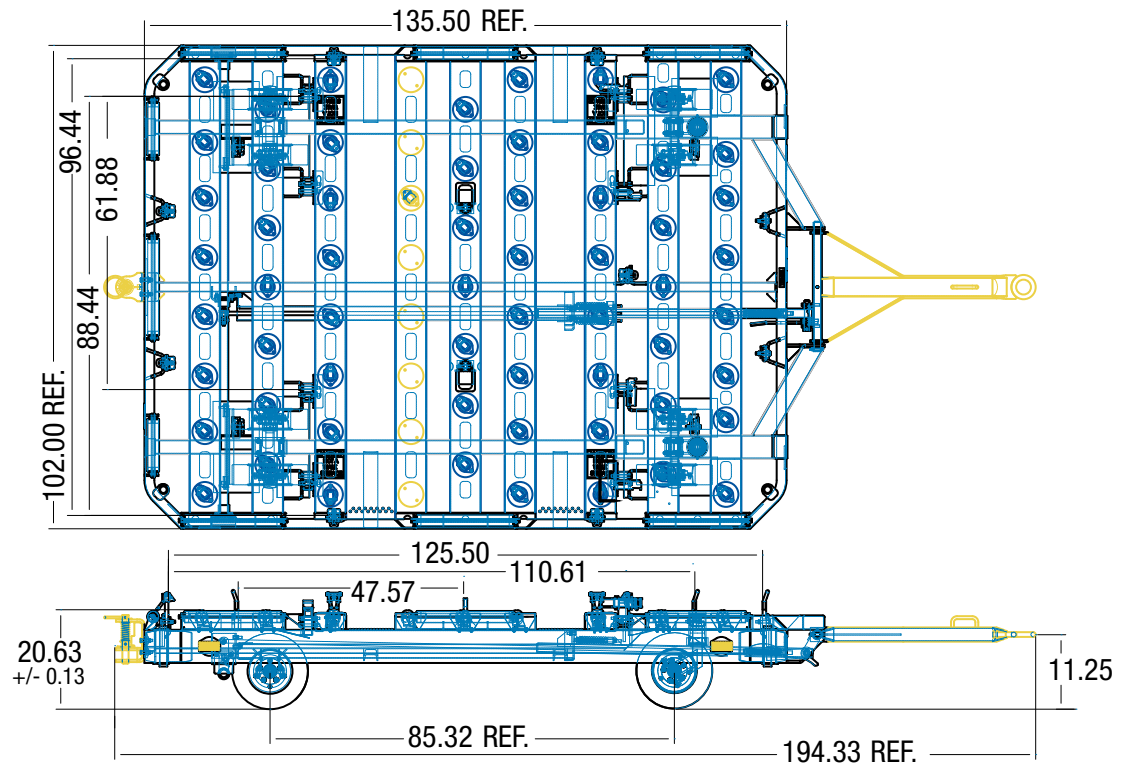

CARTS  
LOADERS  
DOLLIES  
STAIRS  
RACKS  
DECKS

*A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.*

*To learn more, contact our knowledgeable and experienced Team:*

**info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com**